

Tankless water heaters for the professional

***ProTankless*[™] GWH 260 PN**

Features:

- ▶ Standing pilot ignition
- ▶ 78% average efficiency
- ▶ Mounts on wall for easy installation
- ▶ Compact and lightweight
- ▶ Modulating gas valve to control temperature
- ▶ Pressure relief valve included
- ▶ CSA approved
- ▶ 15-year warranty



**Low Volume Tankless
Water Heater with
Pilot Ignition.**




BOSCH

Invented for life

Ideal for low flow camp or cottage use – Standing pilot ignition.

GWH 260 PN Technical Specifications

| | |
|--------------------------|---|
| Power Input | Natural Gas: 30,735 - 74,900 Btu LP Gas: 30,735 - 74,900 Btu |
| Minimum Flow to Activate | 0.5 gallons per minute (gpm) |
| Flow Rates | 45°F rise @ 2.6 gpm 55°F rise @ 2.1 gpm 65°F rise @ 1.7 gpm 77°F rise @ 1.5 gpm 90°F rise @ 1.3 gpm |
| Energy Factor | .64 |
| Thermal Efficiency | 78% |
| Dimensions | 28.8" h x 12.2" w x 8.5" d |
| Weight | 25 lbs. |
| Modulating Gas Valve | Yes |
| Ignition | Standing pilot |

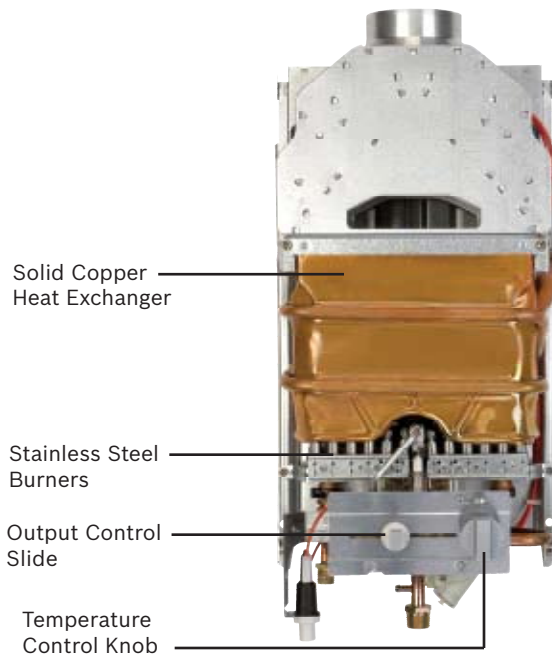


GWH 260 PN Installation Specifications

| | |
|-------------------|-------------------------------------|
| Gas Connection | ½" Male NPT |
| Water Connections | ½" Male NPT |
| NG Gas Pressure | Minimum: 7" WC Maximum: 14" WC |
| LP Gas Pressure | Minimum: 11" WC Maximum: 14" WC |
| Water Pressure | Minimum: 30 PSI Maximum: 150 PSI |


GWH 260 PN Installation Clearances

| | |
|-----------|-----|
| Top (A) | 12" |
| Front (B) | 4" |
| Back | 0" |
| Sides | 4" |
| Floor (C) | 12" |



*On a combustible wall surface the unit should be mounted away from the wall to provide adequate clearance of the vent pipe.

GWH 260 PN Venting Configuration

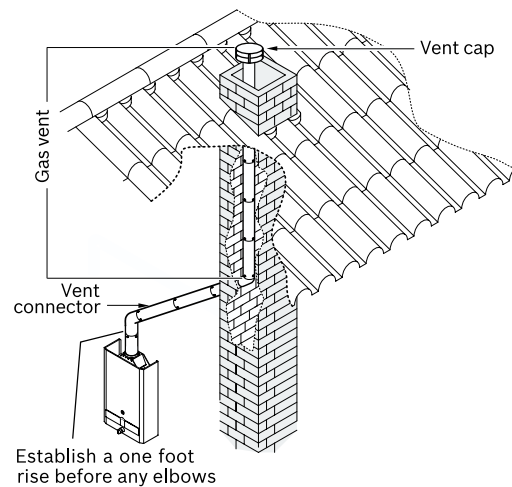

BBT NORTH AMERICA CORPORATION
Bosch Group

Bosch Water Heating
340 Mad River Park
Waitsfield, VT 05673

Telephone: 866.642.3198
www.boschpro.com



BOSCH
Invented for life